Lincoln Hoist


Makers of Quality Hoists Since 1949



Lincoln Hoist (E Series Cable Models

The Original Cable Ratchet Winch Hoist

- MADE IN THE USA.
- Models from 380 to 1800 kg. capacity.
- Handle bends when overloaded to alert operator of overload condition.
- Quick release allows cable to be pulled out freely when rigging hoist.
- Interlocking pawl mechanism no brakes to slip.
- Maintenance free bearings are lubed for life.
- Reversible handle allows pulling in optimum position.
- Open frame construction for easy inspection and cleaning.
- Four hook styles designed to meet application requirements and work practice standards.
- Hooks are drop forged, heat treated steel Made in USA.

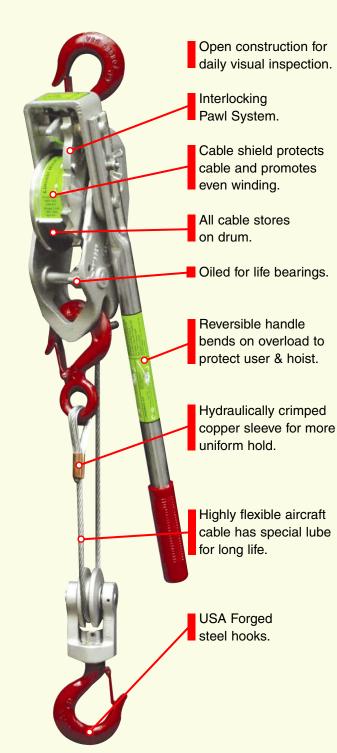

A History of Quality and Innovation

1949 Introduced the first lever hoist using double interlocking pawls.

Patented the first portable hoist with 50 feet of stored cable.

1966 First web strap model introduced.

Patented breakable stress link system for use on fiberglass handles.

1974 Introduced the first 6,000 lb portable hoist with self storing cable.

1986 Produced 1,000,000th portable hoist.

Introduced convertible web hoist using lynch pin fast attachments.



Swaged ball drum anchor – terminal locks cable securely in drum, while allowing for full cable extension.

CE Series Model Specifications For 60 years these models have set the standard for cable winch hoists.											
1 01 00 30			Single Line				Double Line				
Model	Cable Dia. (mm)	Handle Length (cm)	Cap. kg.	Lifting Dist. Meters	Min. Distance Hook to Hook (cm)		Cap. kg.	Lifting Dist. Meters	Min. Distance Hook to Hook (cm)	Hoist Weight kg.	
LH 1000-15CE	4.76	44.5	380	4.5	45			_	-	3.2	
LH 1500-25CE	3.97	38	250	7.5	50		500	3.75	58	3.9	
LH 2250-15CE	4.76	44.5	380	4.5	50		760	2.25	58	4	
LH 2250-20CE	4.76	44.5	380	6	50		760	3	58	4.2	
LH 2250-38CE	4.76	56	380	11.5	56		760	5.75	73	6.2	
LH 3000-10CE	5.56	51	500	3	50] [1000	1.5	58	4.1	
LH 3000-30CE	5.56	63.5	500	9	56		1000	4.5	73	6.2	
LH 4000-20CE	6.35	76	700	6	56		1400	3	73	7	
LH 6000-15CE	7.94	91/140	900	4.5	67		1800	2.25	86	15.5	
Rapid Lowering Model Specifications											
4 Times Faster Lowering When Feature Is Engaged											
LH 115RCE	4.76	44.5	380	4.5	45		_	-	-	3.2	
LH 125RCE	3.97	38	250	7.5	50] [500	3.75	58	3.9	
LH 215RCE	4.76	44.5	380	4.5	50		760	2.25	58	4	
LH 238RCE	4.76	56	380	11.5	56		760	5.75	73	6.2	
LH 310RCE	5.56	51	500	3	50		1000	1.5	58	4.1	
LH 330RCE	5.56	63.5	500	9	56		1000	4.5	73	6.2	
LH 420RCE	6.35	76	700	6	56		1400	3	73	7	

Hook Options – Add Letter Suffix After Model Number

Standard Latch Hook

US made, 360° swiveling hooks are drop forged, heat treated steel.

U Gate Hook

Swivel gate latch provides positive locking action for secure load handling.

PS Clevis Jaw

Jaw fitting provides absolute attachment, high strength forged steel jaws and screw pins.

C Clevis Hook

Available on end of cable only.









Other Products From

Lincoln Hoist

1800 kg. Model LH 6000-15CE

- 1800 kg. Capacity
- Telescoping Handle
- 2 Position Handle Socket
- Shear Pin Breaks to Warn Operator of Overload
- Lighter Than Comparable Chain Hoists



- Mil Spec anodized castings
- · Stainless steel cable
- Heavy plating
- Endurion® coated hooks





Web Strap Hoist

The Preferred Choice of Electric Utilities

- Hoists from 900 to 1800 kg. capacity.
- Breakable stress link Alerts the operator to an overload condition. This patented system enables field replacement of an inexpensive link rather than a complete fiberglass handle.
- Double flanged drum Keeps web strap from coming in contact with ratchet teeth.
- Compact design Easy one hand operation.

For More Information Please Visit
Us on the Web At:
www.LincolnHoist.com

Lincoln Hoist

Mfg. by Lincoln Precision Machining Company
121 Creeper Hill Road • P.O. BOX 458, North Grafton, MA 01536 USA
Phone (774) 551-9000 • Fax (508) 839-4729
E-mail sales@lincolnhoist.com